

AMK501

LCD keyboard drawer



VGA port



DVI-D port



HDMI port

Specification

Model No	AMK501-PB	AMK501-UB
Construction	Heavy-duty steel	
Drawer design	1U, single slide rail LCD KB drawer for 19" cabinet	
Display	17.3", 1920x 1080 resolution with tempered glass Option: 17.3", 1600x 900 with tempered glass	
Protection	Tempered glass protect LCD screen	
Physical security	2 thumb screws to secure LCD monitor	
Ports switch	VGA D-sub 15 pin, PS2 keyboard, touchpad	VGA D-sub 15 pin, USB keyboard, touchpad
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US	
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C	
Power consumption	3 watts stand-by, 25 watts in-use	
Dimension	442.4x 44x 411mm (Wx Hx D)	
Weight	10 kgs	
KVM cable	1.8m PS2 KVM cable	1.8m USB KVM cable

Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	




PS2 KVM Cable



USB KVM Cable

Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17.3" LCD Keyboard drawer
- Built-in 17.3" LCD monitor, 1920x 1080 resolution
Option: 17.3", 1600x 900 LCD monitor
- USB or PS2 keyboard with touchpad
- Industrial keyboard with touchpad
- 1U, 411mm short depth and lightweight
- 2 thumb screws to secure 17.3" LCD monitor
- Built-in rail self-locking device
- Tempered glass protect LCD screen

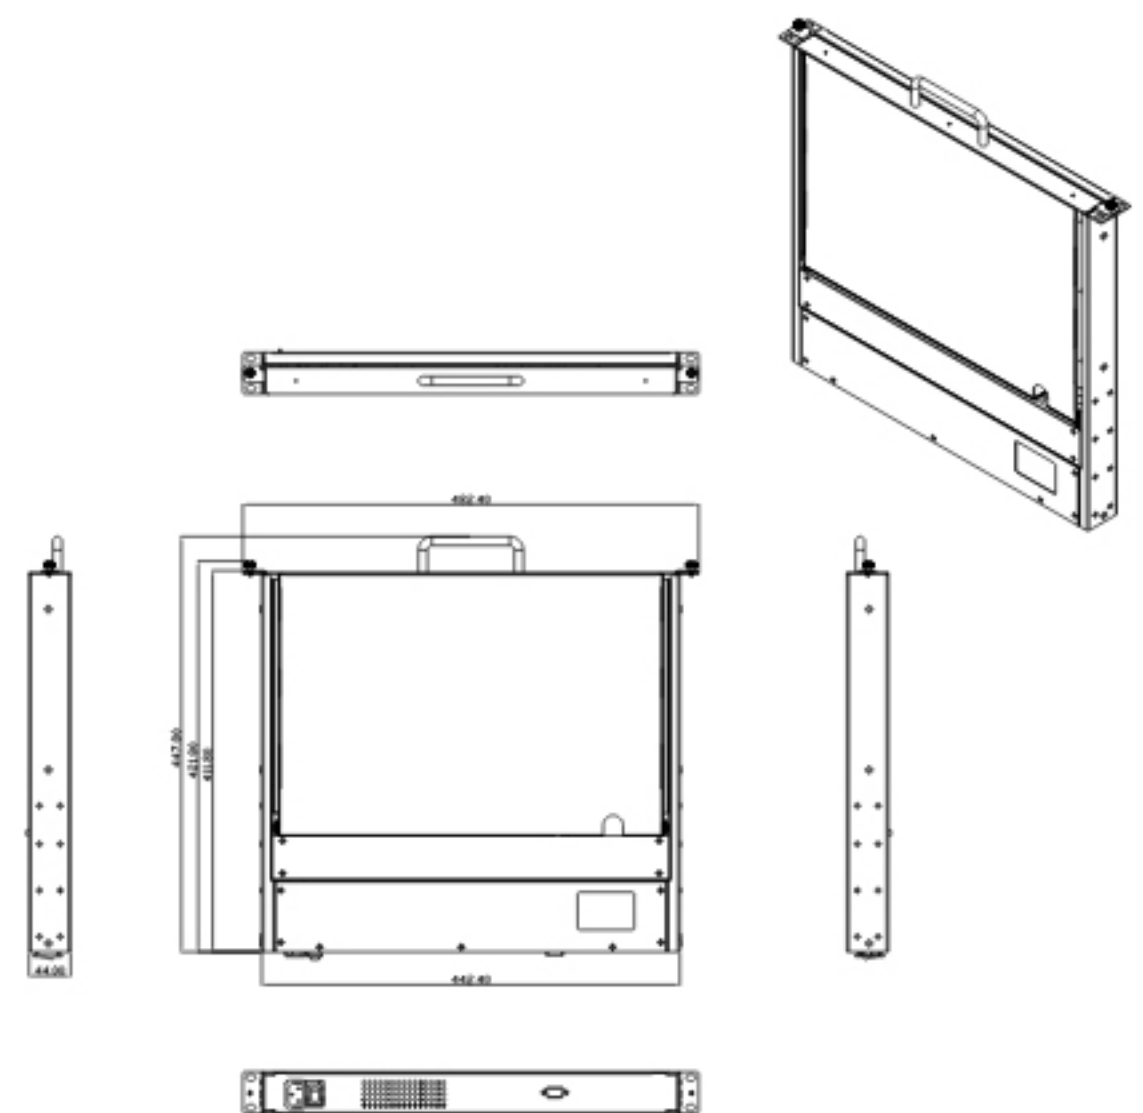

Ordering Information

AMK501-17PBUS

1U, 17.3", 1600x 900 LCD, PS2 KB/MS, 1.8m PS2 KVM cable

AMK501-17UBUS

1U, 17.3", 1600x 900 LCD, USB KB/MS, 1.8m USB KVM cable

AMK501-17WPBUS

1U, 17.3", 1920x 1080 LCD, PS2 KB/MS, 1.8m PS2 KVM cable

AMK501-17WUBUS

1U, 17.3", 1920x 1080 LCD, USB KB/MS, 1.8m USB KVM cable

Option:

80W, 24~48VDC power supply

-48VDC power supply

Touch screen

DVI-D instead of VGA (D-sub 15-pin)

HDMI instead of VGA (D-sub 15-pin)

Sunlight readable (High brightness)

1.8m, 3.0m, 5.0m KVM cable

Keyboard layout: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US