



## Features

- Meets EIA310c & IEC-3 specification
- 1U, Single slide rail, 17.3" LCD Keyboard drawer  
8 port Combo, DVI or HDMI KVM switch
- Built-in 17.3" LCD monitor, 1920x 1080 resolution  
Option: 17.3", 1600x 900 LCD monitor
- Industrial keyboard with touchpad
- 1U, 521mm short depth and lightweight
- 2 thumb screws to secure 17.3" LCD monitor
- Built-in rail self-locking device
- Tempered glass protect LCD screen

## KVM switch


- 8 port Combo, DVI or HDMI KVM switch
- Support password protection and server name
- Support Windows, DOS, Netware, Unix, Linux, IMAC, Power MAC and Sun Micro systems with USB
- Hot plug- add or remove connected computer without powering off the KVM switch or computer
- No software required. Easy computer selection via Front push buttons, Hot Key, OSD manu
- Auto scan mode. Easy to monitor server operation

## Specification

Model No	AMK508-CB	AMK508-VB	AMK508-HB
Construction	Heavy-duty steel		
Drawer design	1U, single slide rail LCD KB drawer for 19" cabinet		
Display	17.3", 1920x 1080 resolution with tempered glass Option: 17.3", 1600x 900 with tempered glass		
Protection	Tempered glass protect LCD screen		
Physical security	2 thumb screws to secure LCD monitor		
KVM switch	8 port Combo KVM	8 port DVI-D KVM	8 port HDMI KVM
Port connection	Daisy chain up to 8 levels to support up to 120 sets		
Port selection	8x Front push buttons, OSD Manu, Hotkey		
LED indication	Power LED indicates a computer is connecting Operation LED indicates the port has been selecting		
Keyboard	Industrial keyboard with touchpad Option KB: CH, FR, GR, IT, JP, KR, PT, RU, SP, UK, US		
Power supply	Built-in 60W, 90~264VAC, Operating temp.: -20~70°C		
Power consumption	3 watts stand-by, 25 watts in-use		
Dimension	442.4x 44x 521.6mm (Wx Hx D)		
Weight	11 kgs		
KVM cable	8x USB KVM cable	8x DVI/ USB cable	8x HDMI/ USB cable

## Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Approval	CE, FCC, RoHS	

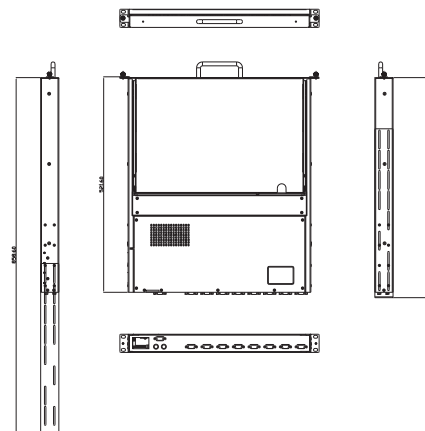

## Ordering Information

### AMK508-17CBUS

1U, 17.3", 1600x 900, 8-port Combo KVM, 8x 1.8m USB cables

### AMK508-17WCBUS

1U, 17.3", 1920x 1080, 8-port Combo KVM, 8x 1.8m USB cables

### AMK508-17VBUS

1U, 17.3", 1600x 900, 8-port DVI KVM, 8x 1.8m DVI/ USB cables

### AMK508-17WVBUS

1U, 17.3", 1920x 1080, 8-port DVI KVM, 8x 1.8m DVI/ USB cables

### AMK508-17HBUS

1U, 17.3", 1600x 900, 8-port HDMI KVM, 8x 1.8m HDMI/ USB cables

### AMK508-17WHBUS

1U, 17.3", 1920x 1080, 8-port HDMI KVM, 8x 1.8m HDMI/ USB cables

### Option:

- 80W, 24~48VDC power supply
- 48VDC power supply