


Basic PDU

PE0212 Series

- The PE0212 series Basic PDU contains 12 AC outlets and is available in IEC or NEMA socket configurations. The PE0212 series Basic PDU features a space-saving 1U design that allows it to be mounted vertically on the outside of a rack, resulting in a more efficient use of space in the server room, while providing 12 AC outlets.

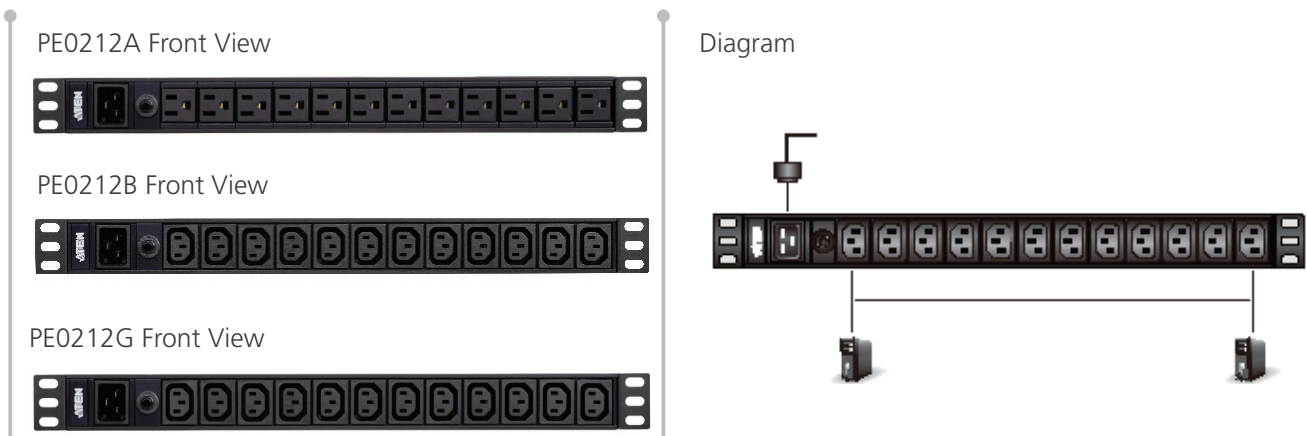

Features

Basic PDU

- Space saving — 1U rack mount design
- IEC or NEMA outlet models
- Overcurrent Protection
- Aluminum material

Typical Applications

- Servers
- Network Devices
- Telecom Equipment

Specifications

Function	PE0212A	PE0212B	PE0212G
Electrical			
Nominal Input Voltage	100-120 VAC	100-240 VAC	100-240 VAC
Maximum Input Current	20A Max (UL de-rated 16A Max)	20A Max (UL de-rated 16A Max)	16A Max
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	IEC-320 C20	IEC-320 C20	IEC-320 C20
Input Power	IEC-320 C19 / NEMA L5-20P or NEMA 5-20P	IEC-320 C19 / NEMA L6-20P	IEC-320 C19 / IEC-320 C20
Outlet Type	(12) NEMA 5-20R	(12) IEC 320 C13	(12) IEC 320 C13
Maximum Output Current (Outlet)	20A Max (UL de-rated 16A Max)	15A Max (UL de-rated 12A Max)	10A max
Maximum Output Current (Bank)	20A Max (UL de-rated 16A Max)	20A Max (UL de-rated 16A Max)	16A max
Maximum Output Current (Total)	20A Max (UL de-rated 16A Max)	20A Max (UL de-rated 16A Max)	16A max
OPD (Overcurrent Protection Device)	Yes	Yes	Yes
Physical Properties			
Dimensions (L x W x H)	48.80 x 4.40 x 4.50 cm	48.80 x 4.40 x 4.50 cm	48.80 x 4.40 x 4.50 cm
Weight	0.88 kg	0.88 kg	0.88 kg
Power Cord Length	10ft (12#)	10ft (12#)	10ft (3x1.5mm ²)
Environmental			
Temperature (Operating / Storage)	0 – 40°C / -20 – 60°C*	0 – 40°C / -20 – 60°C*	0 – 40°C / -20 – 60 °C*
Elevation	3000m	3000m	3000m
Compliance			
EMC Verification	FCC Class A	FCC Class A	CE Class A
Safety Verification	-	-	CE, LVD

*When the environmental temperature comes close 40 degrees, it is recommended to lower the load to 60% to comply to the safety regulations.

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 01/2019 V2.0



© Copyright 2019 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.