
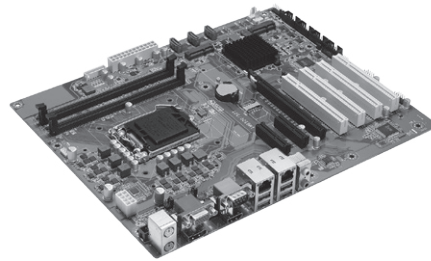


IMB501

ATX Industrial Motherboard with LGA1151 Socket 6th/7th Gen Intel® Core™ Processor, Intel® H110, DDR4, USB 3.0, SATA 3.0, Dual LANs, VGA/DisplayPort/HDMI and mSATA

Features

- LGA1151 socket 6th/7th gen Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor (Skylake/Kaby Lake)
- 2 DDR4- 2133/1866 SO-DIMM, up to 32GB
- DisplayPort, HDMI, and VGA with dual-view supported
- 3 SATA-600
- 4 USB 3.0 and 4 USB 2.0 ports
- Supports mASTA and PCI Express Mini Card

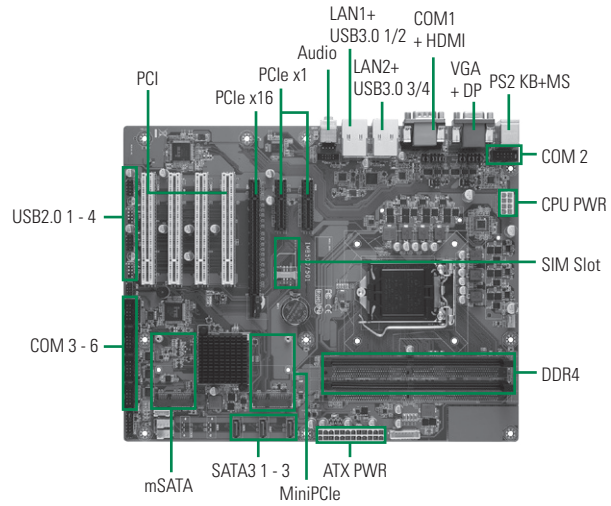

▲ Side view



Core System

CPU	LGA1151 socket 6th/7th generation Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor
System Memory	2 x 288-pin DDR4-2133/1866 DIMM, up to 32GB
Chipset	Intel® H110
BIOS	AMI UEFI BIOS with OA 3.0 built
SSD	1 x mSATA
Watchdog Timer	255 levels, 1-255 sec.
Expansion Interface	1 x PCIe x16 slot 2 x PCIe x4 slot (only support x1 signal) 4 x PCI slot 1 x PCI Express Mini Card 1 x SIM slot
Battery	Lithium 3 V/ 220 mAH
Size/Weight	305 x 244 mm
Board Thickness	1.6 mm
Temperature	0°C ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x PS/2 keyboard & mouse 4 x RS-232 (Internal box header) 2 x RS-232/422/485 (COM 1: rear IO, COM 2: internal box header)
SATA	3 x SATA-600 1 x mSATA
Hardware Monitoring	Detect CPU/system temperature, voltage and supports Smart fan control
Ethernet	1st port as 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® i219LM 2nd port as 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® i210
Audio	HD Codec audio as Mic-in/Line-in/Line-out with Realtek ALC662
USB	4 x USB 3.0 4 x USB 2.0
TPM	N/A
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	8 channels programmable

Display

Display Chipset	Intel® HD graphics 530/510
Memory Size	TBD
Display Interface	1 x DisplayPort 1 x HDMI 1 x VGA

Ordering Information

Standard	
IMB501 (P/N: E38M501101)	ATX industrial motherboard with LGA1151 socket 6th/7th generation Intel® Core™ i7/i5/i3, Pentium® & Celeron® processor, Intel® H110, DDR4, USB 3.0, SATA 3.0, 2 GbE LANs, VGA/DisplayPort/HDMI and mSATA

