


# DRPC-W-EHL

- Fanless DIN-Rail Embedded System
- Elkhart Lake Intel® Celeron® Solution (up to 4 cores)



## Features

- Supported CPU:  
Intel® Celeron® J6412 2.0 GHz (up to 2.6 GHz, quad-core, TDP 10W)
- Support dual independent display
- 2 x 2.5GbE ports
- 1 x M.2 A Key
- 1 x M.2 B Key (with SIM card slot)




External fan module

## Specifications


Model Name		DRPC-W-EHL
Chassis	Color	Black
	Dimensions (WxDxH) (mm)	176 x 116 x 60.8
	System Fan	Fanless
	Chassis Construction	Extruded aluminum alloys
Motherboard	CPU	Intel® Celeron® J6412 2.0 GHz (up to 2.6 GHz, quad-core, TDP 10W)
	Chipset	SoC
	Memory	Onboard LPDDR4X 3200MHz 8G (up to 16GB)
Storage	HDD Bay	1 x 2.5" SATA 6Gb/s HDD bay
IO Interfaces	USB	2 x USB 3.2
	LAN	2 x 2.5GbE
	Display	1 x DP 1 x HDMI
	Others	1 x Power button, 1 x Reset button, 1 x Power LED, 1 x HDD LED, 1 x System fan connector
Internal Expansions	PCIe Mini	N/A
	M.2	1 x M.2 A Key 2230 for WIFI & BT (optional) 1 x M.2 B Key (PCIe x2) 3042 w/SIM slot for 5G (optional)
Power	Power Input	12V DC
	Power Consumption	12V@2.5A (Intel J6412 With 4GB DDR4 Memory)
Reliability	Mounting	DIN-Rail
	Operating Temperature	-20°C ~ 60°C with airflow, 10% ~ 95% non-condensing
	Storage Temperature	-30°C ~ 85°C, 10% ~ 95% non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis
	Operating Vibration	10-500 Hz, 1.04 Grms, random, 1 hr/axis
	Weight (Net/Gross)	0.92/1.16 Kg
	Safety/EMC	CE/FCC/UKCA
Watchdog Timer	Programmable 1 ~ 255 sec/min	
OS	Supported OS	Microsoft® Windows 10 / 11, Linux

Fully Integrated I/O


Front View

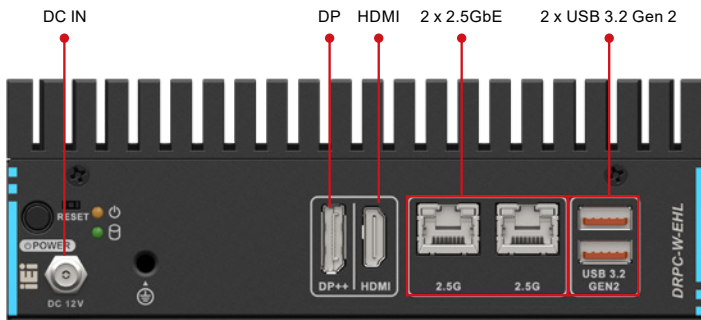

Top View

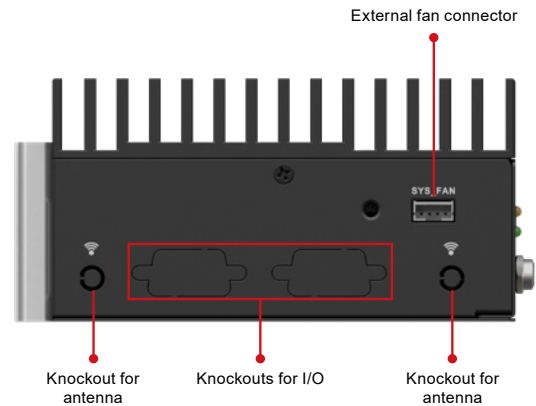

Dimensions (Unit: mm)

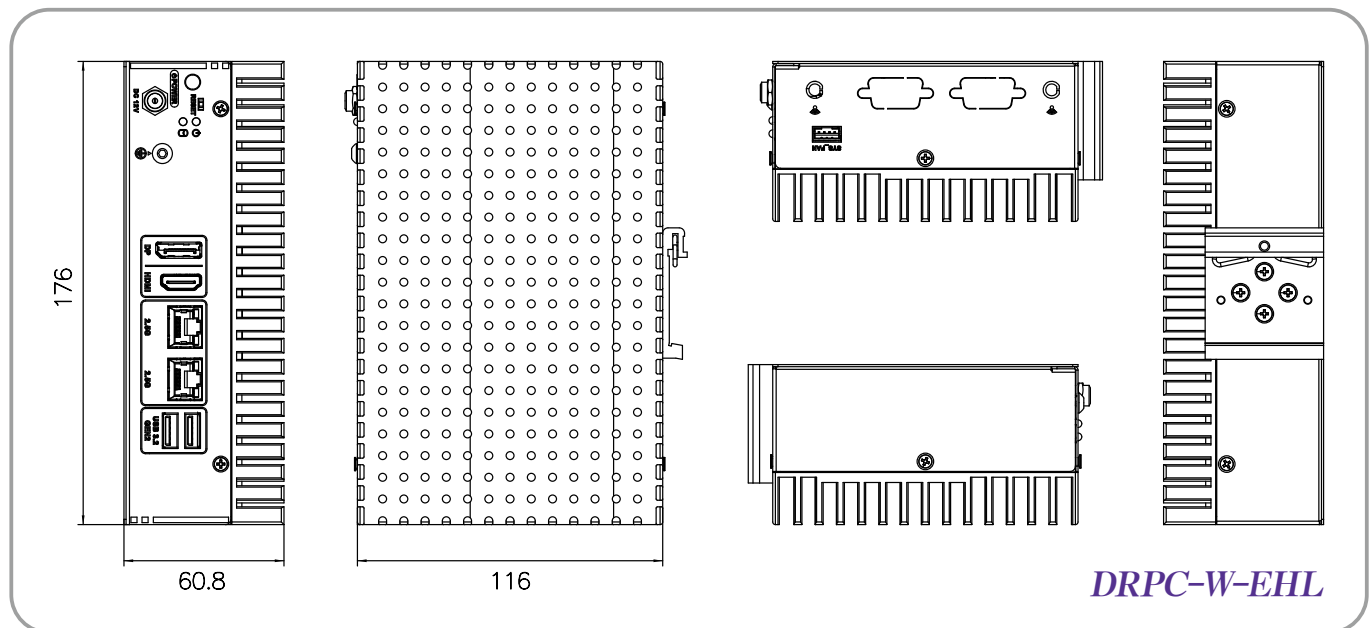

Ordering Information

Part No.	Description
DRPC-W-EHL-JC-R10	Fanless System with Intel® Celeron® J6412 up to 2.6 GHz TDP 10W, 2 x 2.5GbE Lan, 1 x HDMI, 1 x DP, 1 x 2.5" SATA HDD bay, 8GB memory pre-installed, 12V DC, RoHS

Options

Item	Part No.	Description
Adapter	63040-010060-211-RS	Adapter Power;FSP;FSP060-DHAN3;9NA0608097;;Vin:90~264VAC;60W;Dim:62.0*110*31.5mm;Plug=7.5mm;Cable=1200mm;Erp(NO LOAD 0.21W);Vout:12VDC;Φ2.5/Φ5.5/lock;CCL;RoHS
Wifi Kit	EMB-WIFI-KIT02I3-R10	2T2R M.2 wifi module kit for embedded system, IEEE802.11a/b/g/n/ac/ax, 1 x M.2 AE Key Wireless LAN & Bluetooth 5.2;Intel;AX210.NGWG Module, 2 x RF cable, 2 x Antenna; RoHs
Fan Kit	SF-DRPC-W-R10	External fan for DRPC-W Series
COM Cable	32005-003500-200-RS	ROUND CABLE;RS-232/422/485;RS-232 CABLE;2:250MM;26AWG;(A)D-SUB 9P MALE+HEXAGONAL SCREW;(B) MOLEX 51021-0900 P=1.25;,,,,,,;Wins Precision;RoHS
GPIO Cable	32031-000600-100-RS	ROUND CABLE;DIO CABLE;;2;150mm;28AWG;300V;(A)D-SUB 15P MALE;(B)DU PONT 2*7P P=2.0 FEMALE
VGA Kit	IDPM-VGA-R10	eDP to VGA Connector converter board (For IEI Display Module)

Packing List

1 x DIN-rail mounting kit	1 x Screw pack	1 x SATA cable with power cable
---------------------------	----------------	---------------------------------