

# R15L100-PTC3

## 15" Multi-Touch Chassis Display



### KEY FEATURES


- 15" 1024 x 768 Resolution Chassis Display
- Front side strengthened glass
- VGA input and HDMI input
- Stylish and elegant design
- Front IP65



### SPECIFICATIONS

Display	
Resolution	1024x768
Contrast Ratio	800:1
Display Color	16.2M Colors
Active Area	304.128x228.096 mm
Size	15.0 inches
Panel Brightness	350.0 nits
View Angles	80,80,70,80
Touch / Glass	Projected Capacitive Multi Touch Screen Anti-glare Film (Optional)
Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Storage Temperature	-10°C to 60°C
Operating Temperature	0°C to 50°C
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1 x USB for Touch Screen
Audio	1 x Audio Line In 2 x Speaker (Optional)
Video	1 x VGA 1 x HDMI (Optional)
Mechanical	
Dimension	352.5 x 276 x 45 mm
Mounting	VESA Mount
Cooling System	Fanless Design
Weight	2.3 kg
Enclosure	Plastic
Accessory	
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)
Power	
Power Rating	12V DC in 24V DC in (optional)
Control	

**DIMENSIONS** UNIT:MM

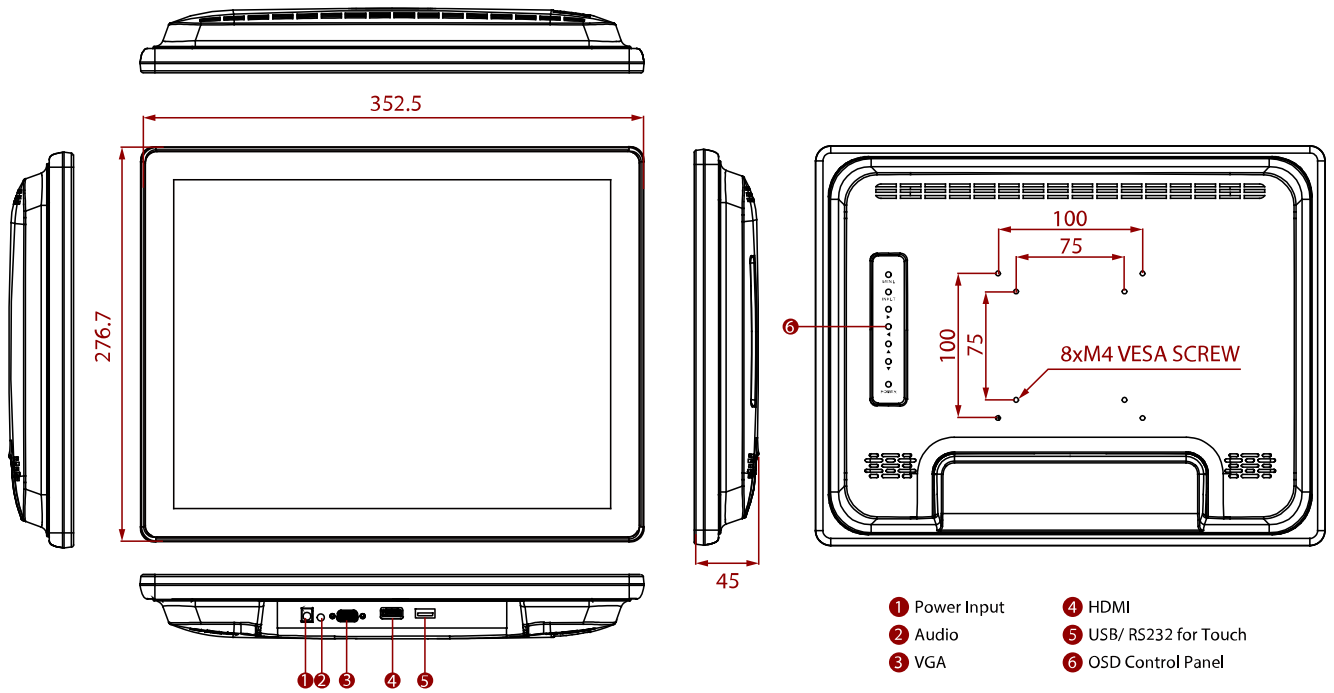

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.