# PAC-1700G 7-slot Full-size Compact Chassis



CD-ROM and HDD are not included in package.

#### **Features**

- RoHS compliant design
- One 5.25" and one 3.5" drive bay
- Two 3.5" internal HDD bays
- Seven expansion slots, compatible with full-size SBC
- 7 expansion slots, compatible with full-size SBC

## **Specifications**


◆ Construction	Metal with plastic front panel				
♦ SBC Form Factor	Full-size, slot CPU card				
♦ Drive Bays	1 x front-accessible 3.5"				
	1 x 5.25"				
	2 x 3.5" HDD				
♦ Cooling Fans	1 x 8 cm				
♦ I/O Openings	1 x LPT, 2 x COM				
♦ Expansion Slots	7 slots				
♦ Indicators	Power, HDD				
♦ Button	Power switch, reset				
♦ Operating Temperature	0°C ~ 50°C				
◆ Operating Humidity	10% ~ 90%				
♦ Color	B: Black				
♦ Weight (Net/Gross)	6 kg/8.4 kg				
♦ Dimensions (DxWxH)	433 mm x 233 mm x 253.7 mm				

### **Ordering Information**

Part No.	Description
PAC-1700GB-R20/A130C	7-slot full-size compact chassis, black, 1 x 8 cm fan, with ACE-A130C-R10 (300W ATX model), RoHS



#### Dimensions (Unit: mm)

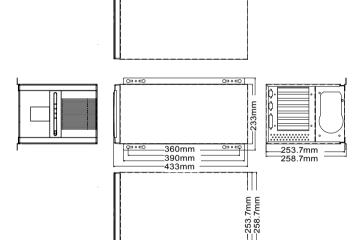

## **Backplane Options**

Model No.	No. SBC Type PCI	ISA	PCle				PSU Connector	
Model No.	SBC Type	FGI	CI ISA	x1	х4	x8	x16	PSU Connector
PCI-7S-RS	PICMG 1.0	4	3	0	0	0	0	AT/ATX
PE-7S*	PICMG 1.3	3	0	2	0	0	1	ATX
PE-7S2*	PICMG 1.3	1	0	4	0	0	1	ATX
HPXE2-7S1	HPCIE	3	0	0	0	2	0	ATX

<sup>\*</sup>Only R20 or later versions support PICMG 1.3 backplane

# **Power Supply Options**

Туре	Model No.	Watt		
ATX	ACE-A130C-R10	300W		
	ACE-A140A-S-R11	400W		

PAC-1700G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.